
SPREADER - 14" GAS / ELECTRIC 1.5 - 2.5 YARD

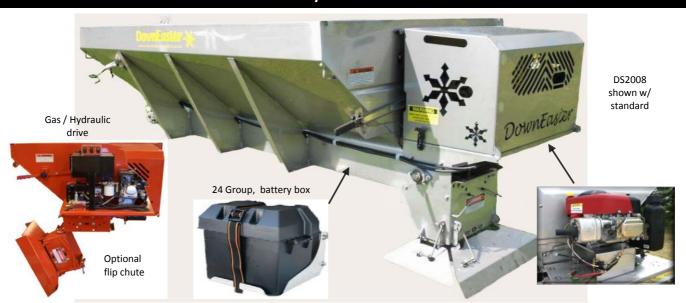

SPECIFICATIONS

Model #		1506	1707	2008	2209	2508
Capacity:	(yards)	1.5	1.7	2.0	2.2	2.5
Hopper size:	(LxWxH)	72" x 50.5" x 32"	84" x 50.5" x 32"	96" x 50.5" x 32"	108" x 50.5" x 32"	96" x 50.5" x 37"
Hopper construction: (SS/HR)				16GA/12GA		
Conveyor Rail:	(SS/HR)			14GA/12GA		
Conveyor bed:	(SS/HR)			12GA/10GA		
Top screens:	(3" openings)			2		
Side gussets: (per side)		2	2	3	3	3
Ship weight: lbs.	(est avg.)	700	7 50	800	850	835
Loaded weight: (2900# per yard) 90/10% sand/salt mix. lbs.		5050	5680	6600	7230	8085
Loaded weight: (1460# per yard) 100% coarse salt lbs.		2890	3232	3720	4062	4485

^{*(} ship weight based on gas engine drive & standard chute)

STANDARD FEATURES

- * In cab, rocker switch control box
- * Hinged / removable top screens
- * 45 deg. sloped sides
- * Double bend top rail, all around
- * Formed over rail w/ built in chain shields
- * Enclosed / hinged motor platform w/ venting
- * 1 1/8" diameter conveyor shafts w/ 6T cast sprockets
- * 662 Pintle chain w/ 8500# tensile strength
- * Greasable, self aligning, drive bearings throughout
- * Recessed lifting hook
- * Adjustable feed gate w/ salt flap.
- * 4 corner tie down points
- Enclosed chute w/ 2 internal,
 3 external, adjustable spreading
 spring loaded locking rods

DRIVE OPTIONS

- * Briggs & Stratton 10.5 HP
- * Honda 11 HP
- * Honda 5.5 HP, self contained gas over hydraulic
- * Direct, hydraulic drive (requires host vehicle power)
- * 1/2 HP Electric single drive motor, thru 50:1 reduction gearbox
- * **DUAL** electric drive motors (w/ variable speed control, for spinner only)
- * Premium DUAL electric drive motors
 (w/ variable speed control, for both motors)

OPTIONS

- * Wireless remote control (gas only)
- * Extended chute
- * Flip chute (N/A for dual electric)
- * Inverted V deflector (std on electric)
- * Vibrator, 200#
- * Front / rear spill shields
- * 24 group marine battery
- * Polypropylene spinner disc





DO NOT EXCEED VEHICLE GVWR



Specifications subject to change without notice

Distributed by: