





BUILT TOUGH, BUILT TO LAST, Since 1979

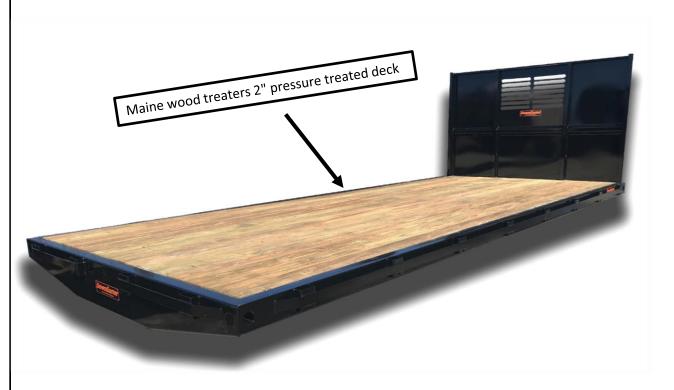



Crossmembers 12" on center

Pictured with 56" cabshield

# **HD PLATFORM BODY - DEPW SERIES**

# SPECIFICATIONS

#### WEIGHTS ESTIMATED

Length	Model	Sill Height	* Cab to Axle (CA)	Bed Dimensions ( W x L )	Body Width OA	Weight Wood deck	Steel floor Wood deck
9'-6'	DEPW09696	5"	60"	92" x 114"	96"	1200	1550
10'-6'	DEPW10696		84" - 102"	92" x 126"		1460	1860
12'-6"	DEPW12696	6"	84"- 108"	92" x 150"		1720	2250
14'-6"	DEPW14696	7"	102" - 138"	92" x 174"		1980	2550
16'-6"	DEPW16696		120" - 150"	92" x 198"		2240	2840
18'-6"	DEPW18696		138" - 156"	92" x 222"		2500	3130
20'-6"	DEPW20696	8"	144" - 168"	92" x 246"		2870	3500
22'-6"	DEPW22696		150" - 186"	92" x 270"		3150	3790
24'-6"	DEPW24696		Min. 168"	92" x 294"		3430	4050
26'-6"	DEPW26696		Min. 186"	92" x 318"		3710	4350

\* Based on Typical straight frame, reg. cab configurations, see your dealer on upfitters guide for your specific application


# STANDARD FEATURES

## GENERAL

- \* 3" x 4.1# Channel cross members, 12" O.C. up to 18'
- \* 5" x 3" Structural angle side longitudanals up to 18'
- \* 4" x 5.4# Channel cross members, 12" O.C. 20' & up
- \* 6" x 8.2# Structural Channel side longitudanals 20' & up
- \* External stake pockets and rubrails
- \* Structural Channel Chassis sills (34")
- \* 3/16" formed front & rear aprons
- \* PT Pine lumber deck
- \* All lighting is LED rubber mounted and NTEA and Federal compliant.
- *Imron*<sup>®</sup> Elite black oven cured paint w/ epoxy primer

## **BULK HEAD**

- \* 12GA panel with formed stiffener, structural tubing uprights
- \* 40" or 56" height options
- \* Slotted dual window
- \* Window delete option

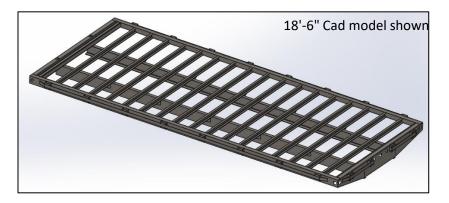

# Distributed by:



Specifications subject to change without notice